Amphenol
FIBER OPTIC PRODUCTS

AMT

Amphenol Multiport Terminal

©2019 Amphenol Fiber Optic Products

FTTx DISTRIBUTION BOX

Optional

AMT (Amphenol Multiport Terminal)

Amphenol offers network distribution points in various configurations and footprints. The Amphenol Multiport Terminal (AMT) is ideally suited for applications where customization and future expansion is required. Various port options and connector styles allow for flexibility and customization depending on the number of outputs needed. Robust plastic design is factory sealed to guarantee IP67/68 ingress protection and applicable GR-771-Core requirements. An optional removable shield is available for added protection.

Features and Benefits

Configurations	4,6,8,12 Port
Input	Adapter, Tether, or Stub
Outputs	Various Adapter Styles
Fiber Type	Single Mode/ Multimode
Mounting	Aerial, Pole, Wall

Mechanical Specifications

Length	316mm
Width	139mm
Height	90mm
Splitter Types	1x4 (QTY3) and 1x3 (QTY4)
Material	Rugged UV Resistant Plastic

Environmental Specifications

Installation Temperature	-18°C to +40°C
Operating Temperature	-40°C to +75°C
Ingress Protection	IP67/IP68 & GR-771-CORE

Industry Compliance

GR	3122 3120 771

©2019 Amphenol Fiber Optic Products

AMT (Amphenol Multiport Terminal)

12 Port Version

Input Options
Adapter, Tether, or Stub

Removable Tethers

Port Identification

IP68 Dust Caps

Private Labeling

Bottom

Front

Rear



Side

Top

SHIELD

Lift and open shield until it clears the AMT



Slide ice shield to the left. When lowered, shield will rest on face of AMT.

Pre-connectorized Trunk

Shield Open Assist Hinge

Black UV Resistant Plastic



Optional Shield Tether

Shield Secure Latch

©2019 Amphenol Fiber Optic Products

MOUNTING OPTIONS

6 Port Version

Mounting Holes

Hole Diameter: ≈7.0mm

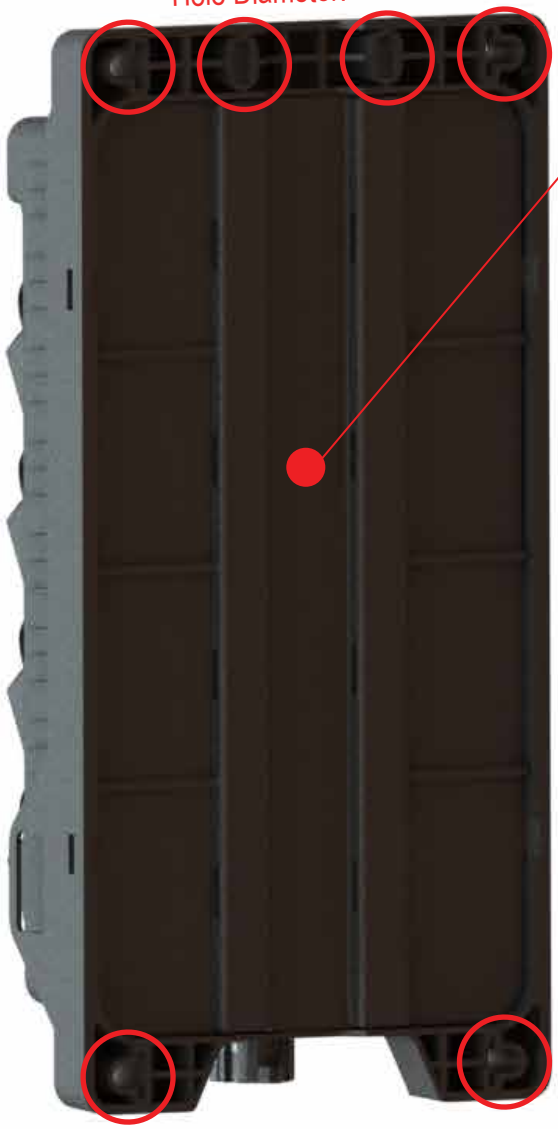

Groove for Pole Mount

Pole Mount

Wall Mount

Aerial Mount